

# MASONS

## Masonry Bond

MASONS Masonry Bond is an acrylic latex cement modifier and bonding agent for concrete, mortar, plaster, repairs, floor toppings, etc.

### USES:

For improving and bonding floor toppings, plasters and mortars, repairs of worn, damaged or spalled concrete, floor screeds and toppings and concrete repair systems. Ideal for use in outside applications subject to continual presence of water.

### ADVANTAGES:

- Provides excellent adhesion to concrete, masonry, plaster, fibre-cement board and most surfaces
- The specific formulation allows thin coatings to be applied in the application of floor toppings, concrete, mortar etc.
- Greatly improves tensile, compressive and flexural properties allowing thin section application of concrete, mortar, floor toppings, etc.
- Excellent bonding is achieved within hours of completion.
- Is not affected by water in exterior situations.
- Chemical and abrasion resistance is improved.
- Available in a strong sturdy container and several different sizes.
- Ready to use from the container.

### APPLICATION:

All applications - must be made free of dust particles and loose material, a clean surface is essential (water blasting or washing may be required). Make sure there is no oils, waxes, curing compounds and old paint etc. To ensure maximum adhesion - use a primer coat. Pre-dampen the surface brush with water, brush off any excess water. Rub or brush undiluted MASONS Masonry Bond into the surface avoiding puddling. For optimum results apply the mortar topping plaster, while the primer is still tacky.

In more difficult situations - such as permanent dampness, very dense floors, etc, make up a mix with a 1:1 mixture of MASONS Masonry Bond and water, added to give a brush able slurry, should be applied firmly onto the surface with a brush or stiff broom and allowed to achieve initial set before the topping, mortar etc. is applied.

A typical mix - design for floor topping or patch repairing is, 2 to 3 clean dry sand, 1 cement with MASONS Masonry Bond, at the rate of 5 litres per 40kg bag of cement, added to the mixing water.

### BRUSH OR BROOM




### MIXING WATER



MASONS

12c Te Kea Place, Albany

Freephone 0800 522 533

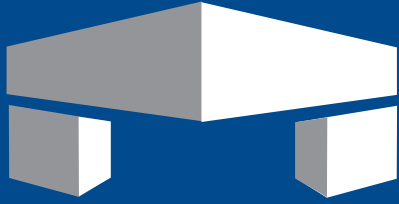

# MASONS

## Masonry Bond

- duct for the intended use is the sole responsibility of the user.