


MASONS

BRICK TIES


Brick ties now come in buckets



SCREW TIE - LONG (110MM)

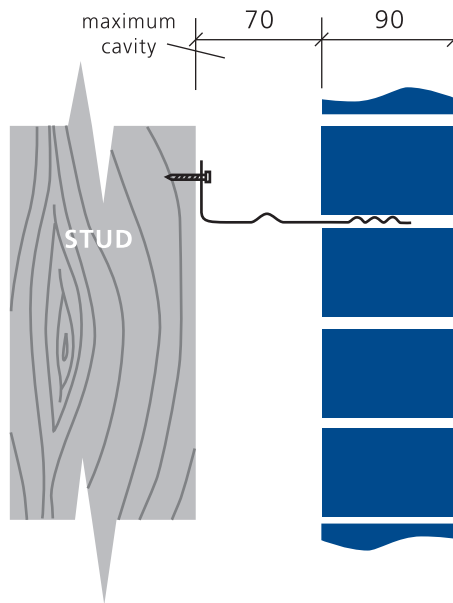

SCREW TIE - SHORT (85MM)

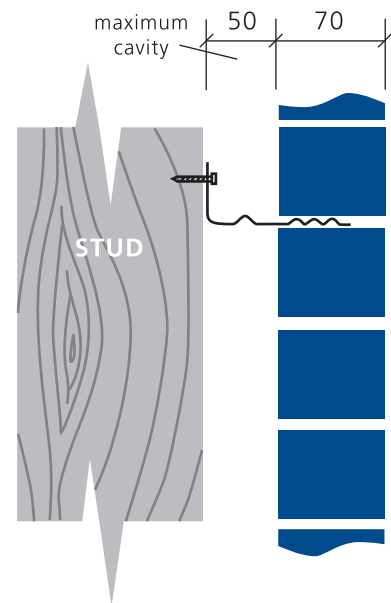

- Tested and approved by OPUS International Consultants
- MASONS Brick Ties are manufactured to comply with AS/NZS2699.1.2000
- Rated Heavy Duty
- Can be used to tie any masonry veneer to a structural frame
- Available in three lengths: 85mm, 110mm & 145mm
- Available in hot dipped galvanised & 316 stainless steel
- Using 316 Stainless Steel provides ultimate durability for houses in sea-spray zones
- Provided with 270 screw fixings and 250 ties per box in hot dipped galvanised

TECHNICAL INFORMATION - BRICK TIE REQUIREMENTS

(THE FOLLOWING IS TO BE USED AS A GUIDE ONLY)

PRODUCT CODE	DESCRIPTION	BUILDING ZONE	HORIZONTAL	VERTICAL
TIE85HD	Hot dipped short tie	Normal Zone	400mm	500mm
TIE110HD	Hot dipped long tie	Normal Zone	450mm	450mm
TIE145HD	Hot dipped long tie	Normal Zone	600mm	400mm
TIE85SS	Stainless Steel short tie	Sea-spray Zone	Approx. 5 brick ties per m ² 100 ties per 1000 bricks	
TIE110SS	Stainless Steel long tie	Sea-spray Zone		
TIE145SS	Stainless Steel long tie	Sea-spray Zone		

AVAILABLE FROM ALL LEADING BUILDING SUPPLY STORES THROUGHOUT NEW ZEALAND

NOTE:

- Minimum cavity width: 40mm and Maximum cavity width: 75mm
- Minimum cover on the end of the tie: 15mm
- Minimum bedding is half the width of the brick. ie; 35mm for a 70mm brick; 45mm for a 90mm brick, etc